



●● risa R

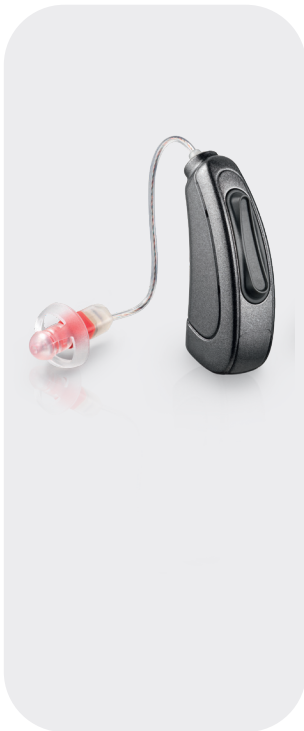

- 2.4 GHz Wireless-Technology
- 10k HD Sound
- Scene Detect  
(2 situations: speech & wind)
- easyclick
- Adaptive Sound Zoom
- Automatic Sound Zoom
- Sound Zoom
- Omni Mic
- Adaptive Noise Guard (2 levels)
- Expansion (Squelch)
- Wind Shield (in Scene Detect)
- Adaptive Feedback Guard
- 12 WDRC-Channels  
(48-channel internal signal processing)
- Multi Channel MPO
- Up to 4 programs
- Rocker Switch (programmable)
- Acoustic indicators
- Start-up Delay
- Tinnitus-Modul
- Data Logging
- MySound!
- Water repellent coating


**Accessories/optional accessories/  
components:**

- audifon App
- CeruStop filter
- Conchaclip
- multistreamer pro
- Receiver unit S-M-P
- UniTip Domes

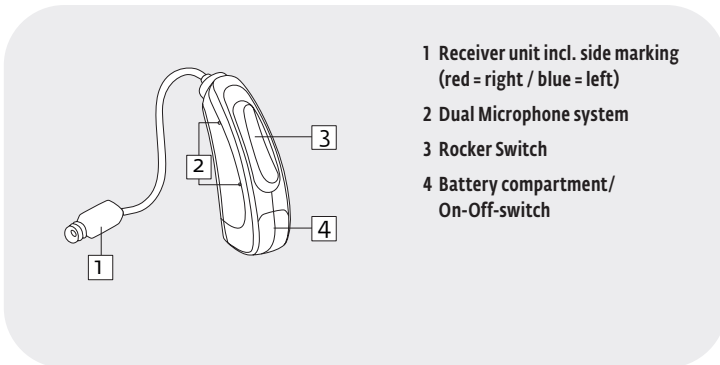

- 1 Receiver unit incl. side marking  
(red = right / blue = left)
- 2 Dual Microphone system
- 3 Rocker Switch
- 4 Battery compartment/  
On-Off-switch

Noahlink®  
Wireless



**Programming**

- with Noahlink Wireless with battery
- alternative with cable CS44 without battery

**Prog.-Box:**

- Noahlink Wireless
- NOAHlink
- HI-PRO
- HI-PRO USB



●● risa R

**Technical Data**

**EN 60118-0:2015** (2 cm<sup>3</sup>-coupler) & **ANSI S3.22-2014** (2 cm<sup>3</sup>-coupler)

	<b>Receiver unit S</b>	<b>Receiver unit M</b>	<b>Receiver unit P</b>
<b>Operating Voltage</b>	1,30 V	1,30 V	1,30 V
<b>Acoustic Gain (50 dB SPL)</b>			
HFA	38 dB	54 dB	64 dB
Peak Value	45 dB	56 dB	67 dB
<b>Max. Output (90 dB SPL)</b>			
HFA	106 dB SPL	115 dB SPL	120 dB SPL
Peak Value	111 dB SPL	117 dB SPL	122 dB SPL
<b>Reference Test Gain</b>	29 dB	38 dB	44 dB
<b>Frequency Range</b>	100 Hz–9.400 Hz	100 Hz–9.100 Hz	100 Hz–7.700 Hz
<b>Total Harmonic Distortions</b>			
500/800/1.600/3.200 Hz	2/2/1/1 %	1/2/1/1 %	2/2/1/1 %
<b>Equivalent Input Noise</b>	26 dB	22 dB	21 dB
<b>Power Consumption with Wireless<sup>1</sup></b>	up to 3,3 mA	up to 3,3 mA	up to 3,3 mA
<b>Battery Type</b>	312	312	312
<b>Average Battery Life with Wireless<sup>1</sup></b>	55 h	55 h	55 h
<b>Tinnitusmasker<sup>2</sup></b>			
Noise Level (RMS)	101 dB	108 dB	109 dB
Frequency Range	100 Hz–8.000 Hz	100 Hz–8.000 Hz	100 Hz–6.400 Hz


<sup>1</sup> depending on the active functions, the use of wireless accessories, the individual hearing loss and the listening environment

<sup>2</sup> only when Tinnitus-Module is activated in audifit




●● **risa R** (Receiver unit S)

**Fitting Range**

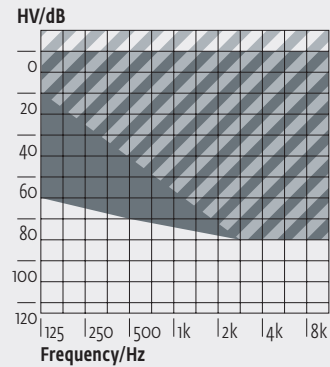

The shaded area applies to the risa R with open dome.


**Third Octave Band Noise**

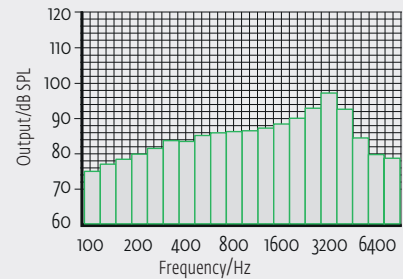


Only when Tinnitus-Module is activated in audifit.

The curves were determined with a 2 cm<sup>3</sup> coupler (EN 60318-5) in accordance with EN 60118-0:2015 at standard settings.


**Maximum Output**

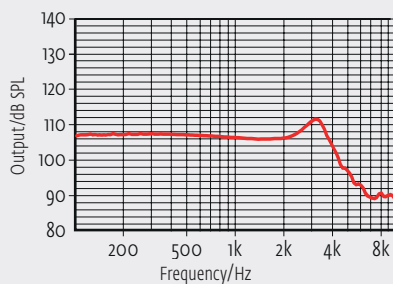

**Acoustic Gain**

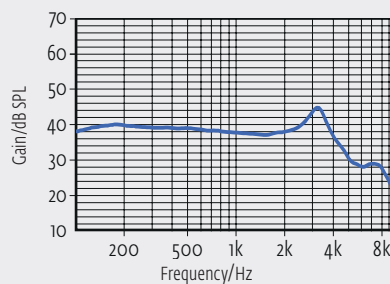


**Frequency Response (RTG)**

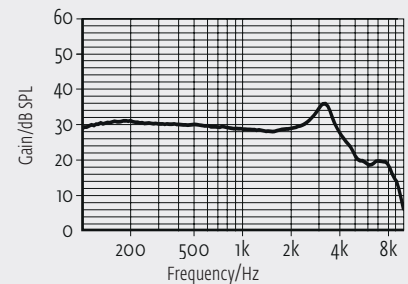

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.


●● **risa R** (Receiver unit M)

**Fitting Range**

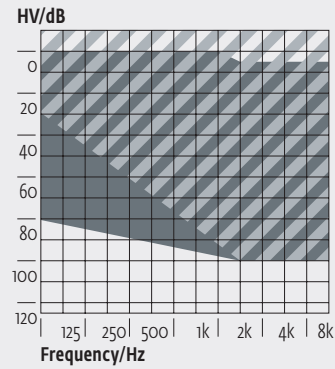

The shaded area applies to the risa R with open dome.


**Third Octave Band Noise**

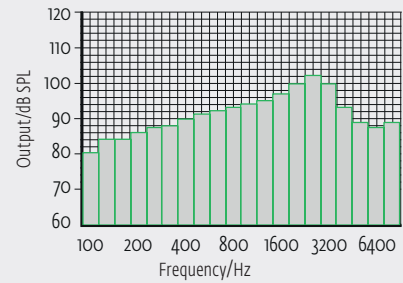


Only when Tinnitus-Module is activated in audifit.

The curves were determined with a 2 cm<sup>3</sup> coupler (EN 60318-5) in accordance with EN 60118-0:2015 at standard settings.


**Maximum Output**

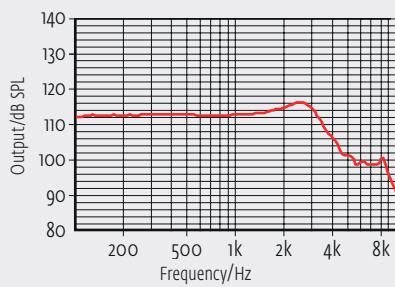

**Acoustic Gain**

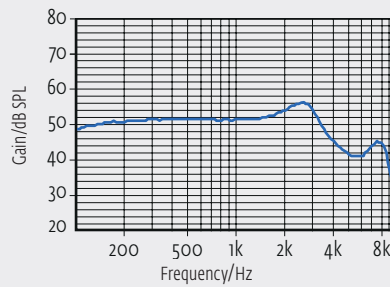


**Frequency Response (RTG)**

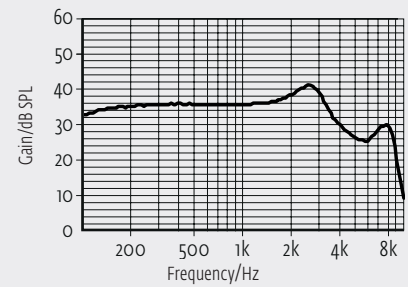

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.


●● **risa R** (Receiver unit P)

**Fitting Range**

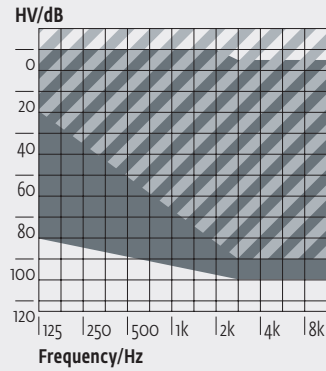

The shaded area applies to the risa R with open dome.


**Third Octave Band Noise**

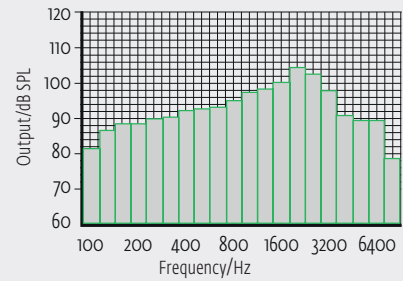


Only when Tinnitus-Module is activated in audifit.

The curves were determined with a 2 cm<sup>3</sup> coupler (EN 60318-5) in accordance with EN 60118-0:2015 at standard settings.


**Maximum Output**

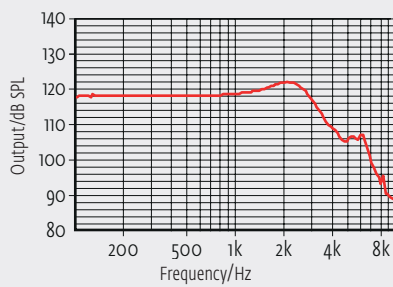

**Acoustic Gain**

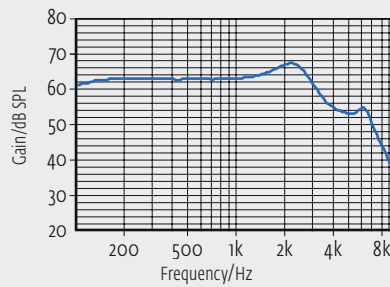

**Frequency Response (RTG)**

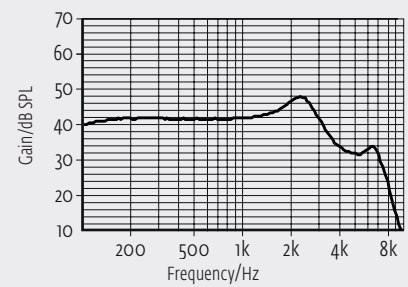

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.