


●● kami ITE



- 10k HD Sound
- Adaptive Sound Zoom
- Sound Zoom
- Adaptive Noise Guard
- Expansion (Squelch)
- Wind Shield
- Adaptive Feedback Guard
- Feedback Check
- 12 WDRC-Channels
- Multi Channel MPO
- Up to 4 Programs
- Low Battery Indicator
- Start-up Delay
- Data Logging
- Live View
- MySound!
- Water repellent coating
- Options: Amplification V50/V60/V70, Battery size 312/13, Switch, Volume control, Auto T-Coil/Auto Phone, T-Coil, Tinnitus-Module, Windscreen/Microphoneshield

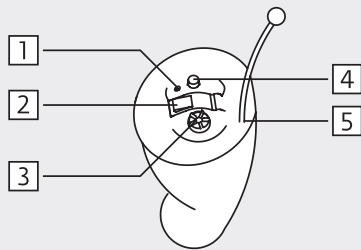

- 1 Microphone inlet
- 2 Battery compartment
- 3 Volume control
- 4 Program switch
- 5 Drawstring

Standard



Programming

- Cable: Cable Set J or K  
 Battery: without Battery  
 Progr-Box: HI-PRO  
 HI-PRO II  
 HI-PRO USB  
 NOAHlink  
 Software: audifit 5.6




●● kami ITE V50

| Technical Data                         | EN 60118-7:2005 (2 cm <sup>3</sup> -coupler) | EN 60118-0/A1:1994 (Ear Simulator) | ANSI S3.22-2014 (2 cm <sup>3</sup> -coupler) |
|--|--|------------------------------------|--|
| <b>Operating Voltage</b>               | 1,30 V                                       | 1,30 V                             | 1,30 V                                       |
| <b>Acoustic Gain (50 dB SPL)</b>       |  |                                    |  |
| HFA                                    | 42 dB  | –                                  | 42 dB  |
| 1600 Hz                                | –  | 49 dB                              | –  |
| Peak Value                             | 50 dB  | 60 dB                              | 50 dB  |
| <b>Max. Output (90 dB SPL)</b>         |  |                                    |  |
| HFA                                    | 106 dB SPL                                   | –                                  | 106 dB SPL                                   |
| 1600 Hz                                | –  | 113 dB SPL                         | –  |
| Peak Value                             | 112 dB SPL                                   | 122 dB SPL                         | 112 dB SPL                                   |
| <b>Reference Test Gain</b>             | 28 dB  | 36 dB                              | 28 dB  |
| <b>Induction Coil Sensitivity</b>      | 72 dB SPL                                    | 82 dB SPL                          | 98 dB SPL                                    |
| <b>Frequency Range</b>                 | 100 Hz–8800 Hz                               | 100 Hz–10000 Hz                    | 100 Hz–8800 Hz                               |
| <b>Total Harmonic Distortions</b>      |  |                                    |  |
| 500/800/1600 Hz                        | 2/2/2 %                                      | 3/4/3 %                            | 2/2/2 %                                      |
| <b>Equivalent Input Noise</b>          | 30 dB  | 29 dB                              | 30 dB  |
| <b>Battery Current</b>                 | 1.27 mA                                      | 1.32 mA                            | 1.27 mA                                      |
| <b>Battery Type</b>                    | 312/13                                       | 312/13                             | 312/13                                       |
| <b>Average Battery Life (Zinc-Air)</b> | 110/180 h                                    | 110/180 h                          | 110/180 h                                    |
| <b>Tinnitusmasker*</b>                 |  |                                    |  |
| Noise Level (RMS)                      | 101  | 111                                | 101  |
| Frequency Range                        | 100 Hz–8000 Hz                               | 200 Hz–8000 Hz                     | 100 Hz–8000 Hz                               |

\* Only when Tinnitus-Module is activated in audifit.

Fitting Range

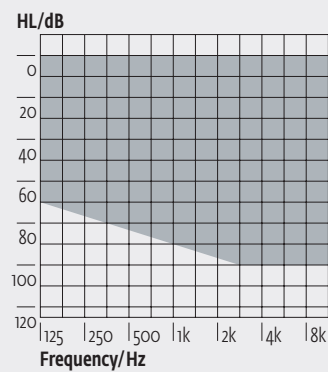


The fitting range applies to kami ITE with V50.


●● kami ITE V50

All curves are measured with Ear Simulator (EN 60318-4:2010) in reference setting.


Maximum Output

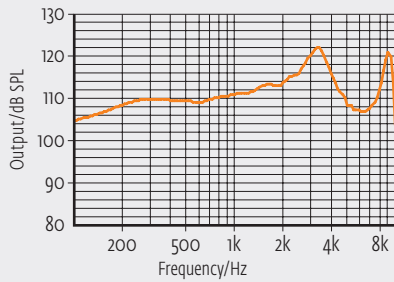


Acoustic Gain

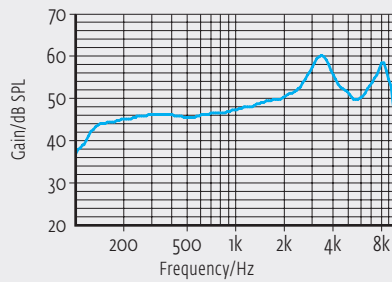

Frequency Response (RTG)

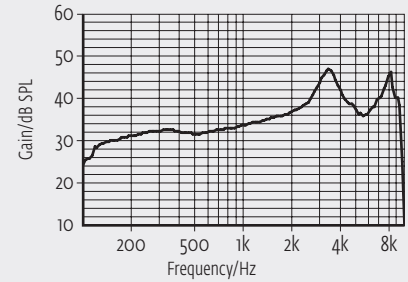


Third Octave Band Noise\*\*

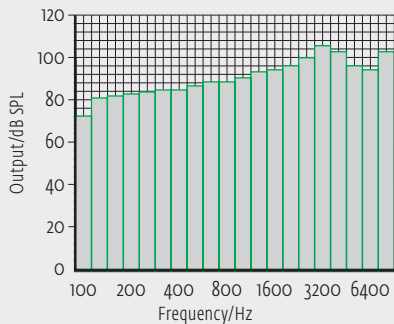


\*\* Only when Tinnitus-Module is activated in audifit.

All curves are measured with 2cm<sup>3</sup>-coupler (EN 60318-5:2006) in reference setting.


Maximum Output

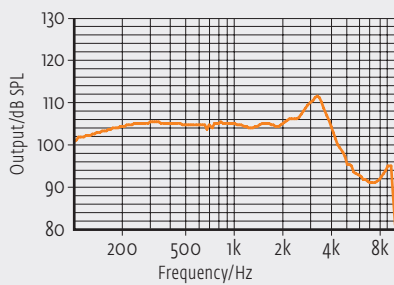


Acoustic Gain

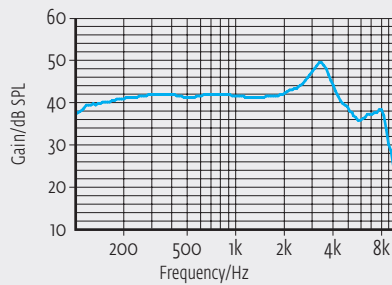

Frequency Response (RTG)

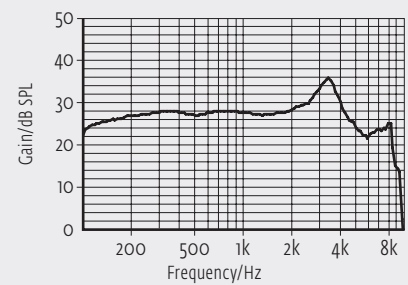

Induction Coil Sensitivity

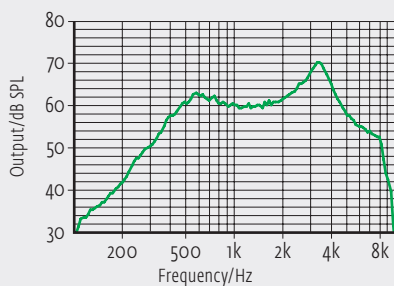


On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.

●● kami ITE V6o

| Technical Data                         | EN 60118-7:2005 (2 cm <sup>3</sup> -coupler) | EN 60118-0/A1:1994 (Ear Simulator) | ANSI S3.22-2014 (2 cm <sup>3</sup> -coupler) |
|--|--|------------------------------------|--|
| <b>Operating Voltage</b>               | 1,30 V                                       | 1,30 V                             | 1,30 V                                       |
| <b>Acoustic Gain (50 dB SPL)</b>       |  |                                    |  |
| HFA                                    | 54 dB  | –                                  | 54 dB  |
| 1600 Hz                                | –  | 62 dB                              | –  |
| Peak Value                             | 61 dB  | 70 dB                              | 61 dB  |
| <b>Max. Output (90 dB SPL)</b>         |  |                                    |  |
| HFA                                    | 112 dB SPL                                   | –                                  | 112 dB SPL                                   |
| 1600 Hz                                | –  | 119 dB SPL                         | –  |
| Peak Value                             | 115 dB SPL                                   | 125 dB SPL                         | 115 dB SPL                                   |
| <b>Reference Test Gain</b>             | 35 dB  | 42 dB                              | 35 dB  |
| <b>Induction Coil Sensitivity</b>      | 80 dB SPL                                    | 93 dB SPL                          | 105 dB SPL                                   |
| <b>Frequency Range</b>                 | 100 Hz–9400 Hz                               | 100 Hz–10000 Hz                    | 100 Hz–9400 Hz                               |
| <b>Total Harmonic Distortions</b>      |  |                                    |  |
| 500/800/1600 Hz                        | 1/2/1 %                                      | 2/2/1 %                            | 1/2/1 %                                      |
| <b>Equivalent Input Noise</b>          | 24 dB  | 29 dB                              | 24 dB  |
| <b>Battery Current</b>                 | 1,35 mA                                      | 1,25 mA                            | 1,35 mA                                      |
| <b>Battery Type</b>                    | 312/13                                       | 312/13                             | 312/13                                       |
| <b>Average Battery Life (Zinc-Air)</b> | 110/170 h                                    | 110/170 h                          | 110/170 h                                    |
| <b>Tinnitusmasker*</b>                 |  |                                    |  |
| Noise Level (RMS)                      | 104  | 116                                | 104  |
| Frequency Range                        | 100 Hz–8000 Hz                               | 200 Hz–8000 Hz                     | 100 Hz–8000 Hz                               |

\* Only when Tinnitus-Module is activated in audifit.

Fitting Range

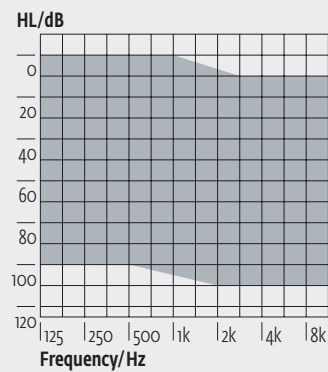


The fitting range applies to kami ITE with V6o.


●● kami ITE V6o

All curves are measured with Ear Simulator (EN 60318-4:2010) in reference setting.


Maximum Output

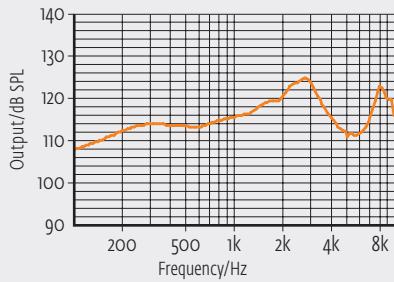


Acoustic Gain

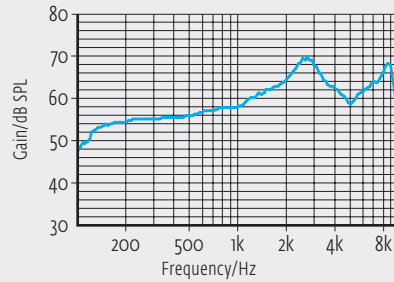

Frequency Response (RTG)

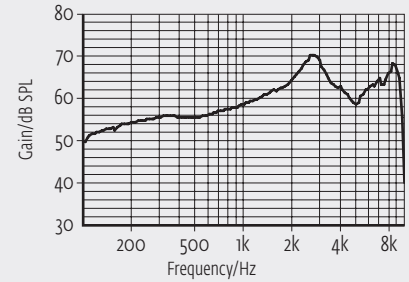


Third Octave Band Noise\*\*

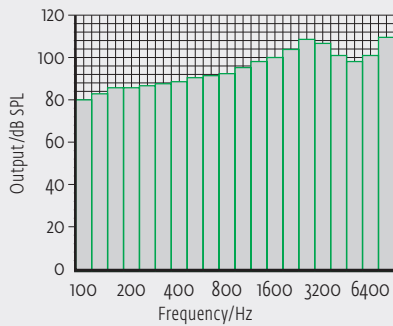


\*\* Only when Tinnitus-Module is activated in audifit.

All curves are measured with 2cm<sup>3</sup>-coupler (EN 60318-5:2006) in reference setting.


Maximum Output

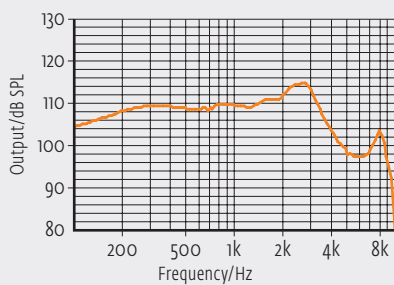


Acoustic Gain

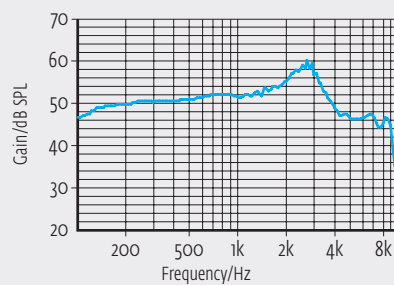

Frequency Response (RTG)

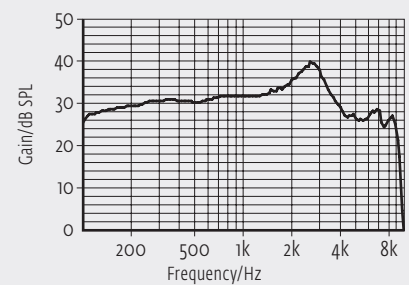

Induction Coil Sensivity

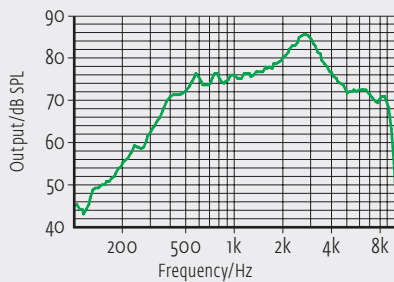


On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.

●● kami ITE V70

| Technical Data                         | EN 60118-7:2005 (2 cm <sup>3</sup> -coupler) | EN 60118-0/A1:1994 (Ear Simulator) | ANSI S3.22-2014 (2 cm <sup>3</sup> -coupler) |
|--|--|------------------------------------|--|
| <b>Operating Voltage</b>               | 1,30 V                                       | 1,30 V                             | 1,30 V                                       |
| <b>Acoustic Gain (50 dB SPL)</b>       |  |                                    |  |
| HFA                                    | 64 dB  | –                                  | 64 dB  |
| 1600 Hz                                | –  | 74 dB                              | –  |
| Peak Value                             | 70 dB  | 78 dB                              | 70 dB  |
| <b>Max. Output (90 dB SPL)</b>         |  |                                    |  |
| HFA                                    | 126 dB SPL                                   | –                                  | 126 dB SPL                                   |
| 1600 Hz                                | –  | 138 dB SPL                         | –  |
| Peak Value                             | 131 dB SPL                                   | 139 dB SPL                         | 131 dB SPL                                   |
| <b>Reference Test Gain</b>             | 49 dB  | 60 dB                              | 49 dB  |
| <b>Induction Coil Sensitivity</b>      | 92 dB SPL                                    | 103 dB SPL                         | 119 dB SPL                                   |
| <b>Frequency Range</b>                 | 100 Hz–6500 Hz                               | 100 Hz–6700 Hz                     | 100 Hz–6500 Hz                               |
| <b>Total Harmonic Distortions</b>      |  |                                    |  |
| 500/800/1600 Hz                        | 1/1/1 %                                      | 2/2/1 %                            | 1/1/1 %                                      |
| <b>Equivalent Input Noise</b>          | 23 dB  | 20 dB                              | 23 dB  |
| <b>Battery Current</b>                 | 1.60 mA                                      | 1.28 mA                            | 1.60 mA                                      |
| <b>Battery Type</b>                    | 312/13                                       | 312/13                             | 312/13                                       |
| <b>Average Battery Life (Zinc-Air)</b> | 90/140 h                                     | 90/140 h                           | 90/140 h                                     |
| <b>Tinnitusmasker*</b>                 |  |                                    |  |
| Noise Level (RMS)                      | 111  | 119                                | 111  |
| Frequency Range                        | 100 Hz–6400 Hz                               | 200 Hz–8000 Hz                     | 100 Hz–6400 Hz                               |

\* Only when Tinnitus-Module is activated in audifit.

Fitting Range

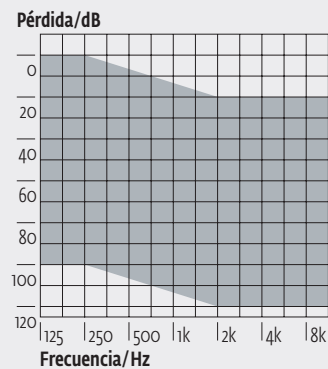


The fitting range applies to kami ITE with V70.


●● kami ITE V70

All curves are measured with Ear Simulator (EN 60318-4:2010) in reference setting.


Maximum Output

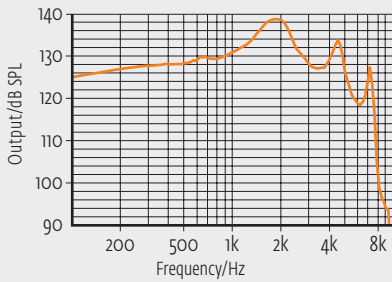


Acoustic Gain

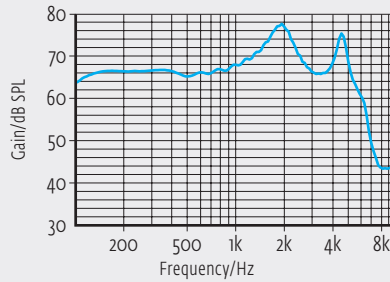

Frequency Response (RTG)

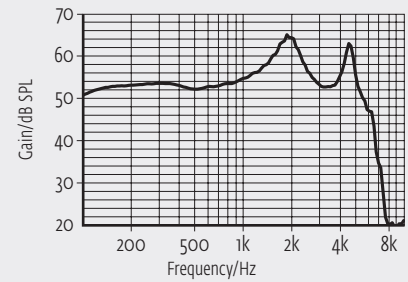


Third Octave Band Noise\*\*

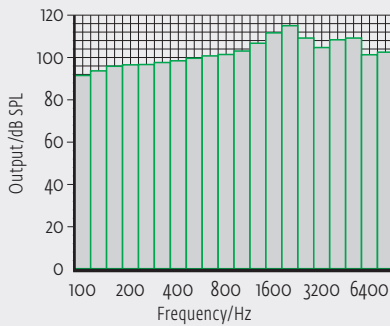


\*\* Only when Tinnitus-Module is activated in audifit.

All curves are measured with 2cm<sup>3</sup>-coupler (EN 60318-5:2006) in reference setting.


Maximum Output

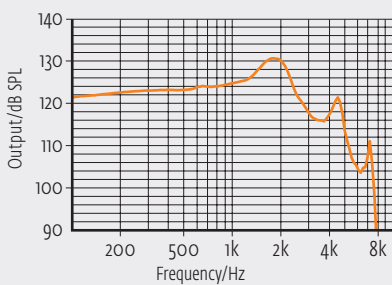


Acoustic Gain

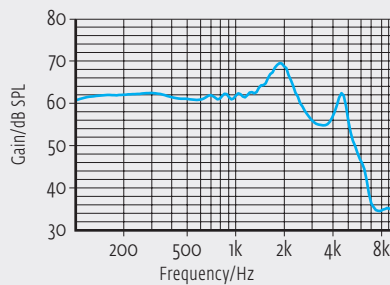

Frequency Response (RTG)

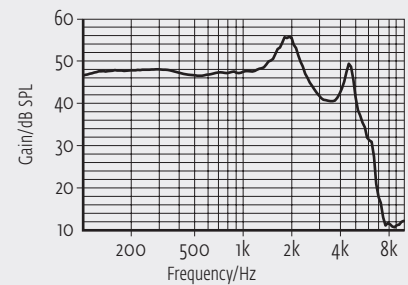

Induction Coil Sensitivity

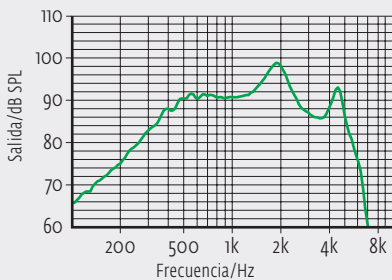

On account of the complex signal processing, the measurements of the represented curves are only possible in default setting of the device and under use of the current valid software version. Effects of the separate parameters see software.